

SMD POWER INDUCTORS 贴片功率电感**CDH 系列****FEATURES**

- With magnetic shield against radiation.
- High power ,low DC resistance.
- Suitable for surface mount equipment.

特 征

- 带屏蔽罩, 防止高频辐射干扰;
- 大功率, 高饱和电流, 低阻抗;
- 适合表面贴装。

APPLICATIONS

- Power supply choke for VTR,LCD display, Note book, communication ,OA equipments , Mother board,MP3,MP4 etc.

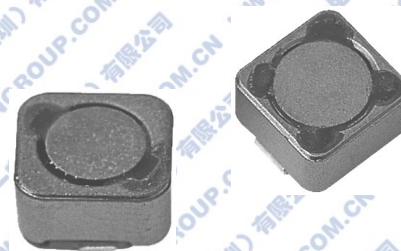
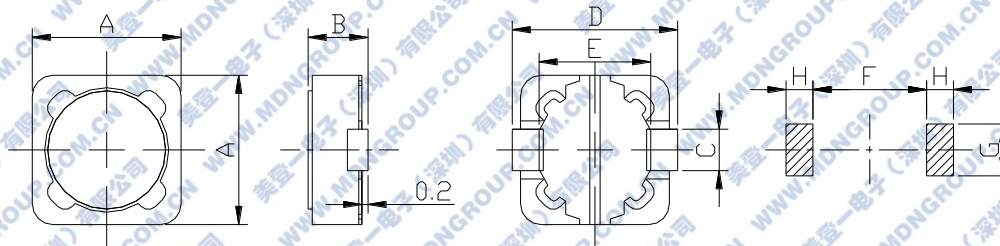
用 途

- 录像机、液晶显示器、笔记本电脑、通讯设备、电脑主机板、办公自动化设备的电源扼流;MP3,MP4 等。

ORDERING CODE

CDH 73 - 100 M T

Packing style(T:taping; B: bulk)
 Tol.(K:±10%;M:±20%;N:±30%)
 Inductance value(uH)
 Specification
 Type

SHAPE**DIMENSIONS AND LAND PATTERNS(mm)**

TYPE	A (MAX)	B (MAX)	C	D	E	F	G	H
CDH73	7.50	3.40	1.80	7.20	5.40	4.80	2.20	1.50
CDH74	7.50	4.50	1.80	7.20	5.40	4.80	2.20	1.50
CDH105	10.00	5.00	2.00	10.30	7.00	6.80	2.20	2.00

SMD POWER INDUCTORS 贴片功率电感

CDH 系列

PART NO.	L	TEST CONDITIONS	CDH73		CDH74		CDH105	
			DCR	Idc	DCR	Idc	DCR	Idc
			(Ω)max	(A)max	(Ω)max	(A)max	(Ω)max	(A)max
1R0	1.0uH	100KHz/ 0.25V	0.020	4.00	0.015	5.00		
1R5	1.5uH	100KHz/ 0.25V			0.020	4.50		
1R8	1.8uH	100KHz/ 0.25V						
2R2	2.2uH	100KHz/ 0.25V	0.025	3.50	0.022	4.00		
2R7	2.7uH	100KHz/ 0.25V						
3R3	3.3uH	100KHz/ 0.25V						
3R9	3.9uH	100KHz/ 0.25V						
4R7	4.7uH	100KHz/ 0.25V	0.045	2.70	0.035	3.00		
5R6	5.6uH	100KHz/ 0.25V						
6R8	6.8uH	100KHz/ 0.25V	0.055	2.50	0.040	2.80		
8R2	8.2uH	100KHz/ 0.25V	0.065	2.00				
100	10uH	1KHz/ 0.25V	0.100	1.80	0.050	2.00	0.045	2.50
120	12uH	1KHz/ 0.25V	0.110	1.60	0.065	1.90	0.050	2.20
150	15uH	1KHz/ 0.25V	0.125	1.40	0.080	1.70	0.055	2.00
180	18uH	1KHz/ 0.25V	0.135	1.30	0.100	1.55	0.075	1.80
220	22uH	1KHz/ 0.25V	0.170	1.20	0.115	1.40	0.080	1.60
270	27uH	1KHz/ 0.25V	0.200	1.00	0.130	1.30	0.090	1.50
330	33uH	1KHz/ 0.25V	0.235	0.95	0.180	1.20	0.11	1.30
390	39uH	1KHz/ 0.25V	0.255	0.92	0.200	1.00	0.13	1.20
470	47uH	1KHz/ 0.25V	0.29	0.88	0.230	0.90	0.15	1.10
560	56uH	1KHz/ 0.25V	0.38	0.80	0.260	0.80	0.17	1.00
680	68uH	1KHz/ 0.25V	0.43	0.70	0.325	0.75	0.20	0.95
820	82uH	1KHz/ 0.25V	0.61	0.60	0.360	0.70	0.26	0.90
101	100uH	1KHz/ 0.25V	0.70	0.54	0.450	0.68	0.31	0.85
121	120uH	1KHz/ 0.25V	0.90	0.50	0.50	0.65	0.36	0.80
151	150uH	1KHz/ 0.25V	1.00	0.45	0.65	0.60	0.45	0.75
181	180uH	1KHz/ 0.25V	1.30	0.40	0.75	0.55	0.52	0.70
221	220uH	1KHz/ 0.25V	1.65	0.35	1.10	0.45	0.65	0.65
271	270uH	1KHz/ 0.25V	1.80	0.33	1.30	0.42	0.76	0.60
331	330uH	1KHz/ 0.25V	2.20	0.30	1.45	0.38	0.96	0.55
391	390uH	1KHz/ 0.25V	3.00	0.28	1.75	0.33	1.10	0.50
471	470uH	1KHz/ 0.25V	3.50	0.26	2.60	0.28	1.50	0.48
561	560uH	1KHz/ 0.25V	3.80	0.25	2.90	0.26	1.70	0.35
681	680uH	1KHz/ 0.25V	4.30	0.22	3.20	0.24	1.90	0.30
821	820uH	1KHz/ 0.25V	5.50	0.20	3.65	0.22	2.50	0.25
102	1.0mH	1KHz/ 0.25V	6.50	0.18	5.40	0.20	2.90	0.22

REMARK:

- 电感公差范围/Tolerance of Inductance: $L \leq 8.2\mu\text{H}$ $\pm 30\%$; $L \geq 10\mu\text{H}$ $\pm 20\%$ 。
- 额定电流/Idc (Rated DC Current): 电感值下降至初期值的 35%或温度上升至 40℃时的直流电流值中的最小值(环境温度 20℃)。